


HS-CE-SRM Connection Enclosure

Stainless Steel with protective roof

Key Features

- Protective roof to stop dust and dirt settling
- Provides a terminal to take readings from accelerometers via a portable data-collector
- Multiple outputs via multiple connectors

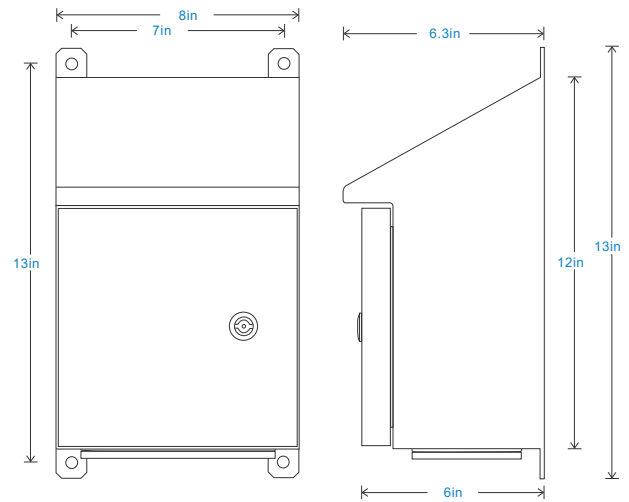

Technical Performance

Inputs	Via accelerometer	Door	Lock and polyamide key
Output	BNC as standard (TNC as alternative)	Glanding	Glands supplied but not fitted
Mounting Board	PCB Panel		Holes are punched for:
Material	304 Stainless Steel		Single input M12 - $\varnothing 0.1-0.3$ in cable
Dimensions	see: 'How To Order' table		Single input M20 - $\varnothing 0.3-0.7$ in multi-core cable
Sealing	NEMA 4		Multi input M20 - 3 x $\varnothing 0.2$ in
Termination	Spring-loaded terminal (no screwdriver required)	Labelling	Channel locations - other labelling available upon request
		Mounting	supplied are 4 x Brackets
		EMC	EN61326-1:2013

How To Order

