


# HS-SEC-SR Compact Switching Enclosure

Stainless Steel with protective roof

## Key Features

- Protective roof to stop dust and dirt settling
- Multiple outputs via one connector
- Compact design

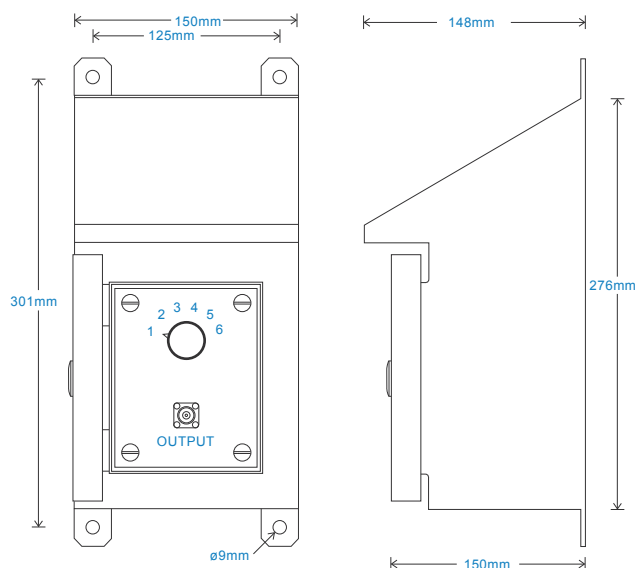

## Technical Performance

Inputs	Via accelerometer	Door	Twist Handle
Output	BNC as standard (alternatives can be specified in 'How To Order' table)	Glanding	Glands supplied but not fitted
Mounting Board	Engraved traffolyte panel (customisable upon request)		Holes are punched for:
			Single input M12 - ø3.5-7mm cable
			Single input M20 - ø7-13mm multi-core cable
Material	304 Stainless Steel (to be specified in options of 'How To Order' table)		Multi input M20 - 3 x ø5.3mm
Dimensions	see: diagram	Labelling	Channel locations - other labelling available upon request
Sealing	IP66	Mounting	supplied are 4 x Brackets
Termination	Din rail terminals wired to switch	EMC	EN61326-1:2013

## How To Order

