
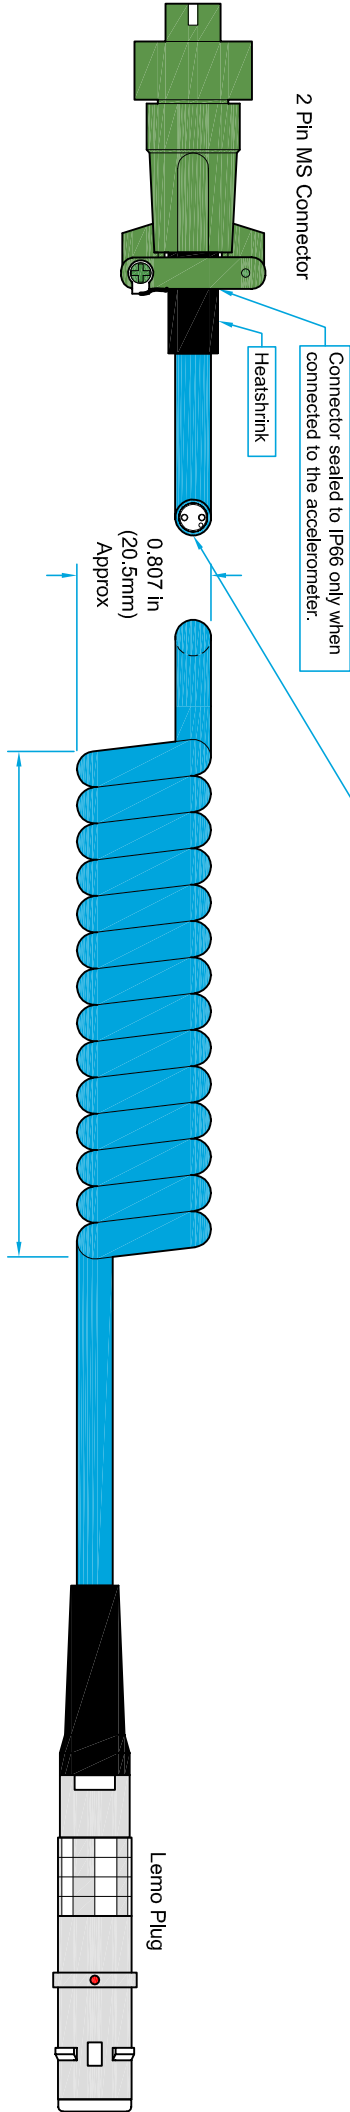
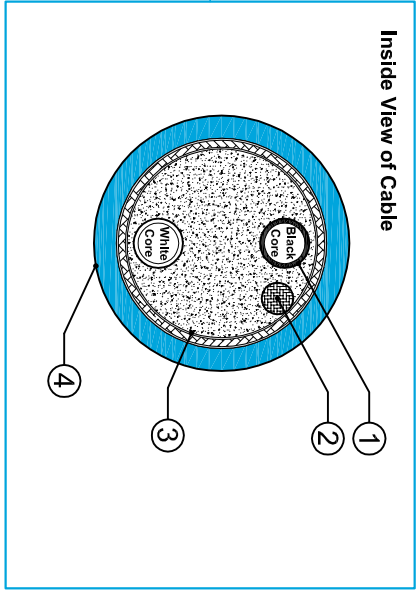


Connection Details of Cable Assembly

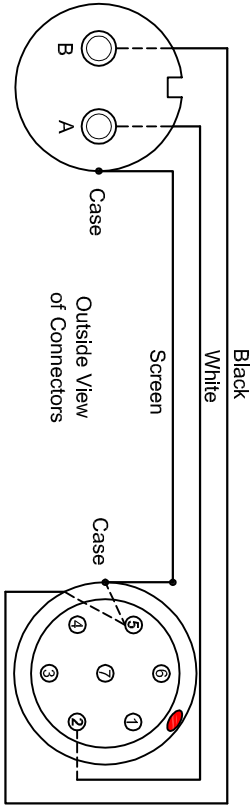

Materials of Cable: Polyurethane Screened Coiled Cable			
Pos	Description	Overall Diameter	Remarks
1.	Tin plated copper conductor	0.040 in (1.02mm)	2 x 24 AWG
2.	Screen wire of tin plated copper		24 AWG
4.	Braided screen of tin plated copper		Spiral serve 38 AWG
5.	Polyurethane jacket	0.212 in ± 0.003 in (5.4mm (±0.1mm)	Non flame retardant, rated from -40°F to + 176°F (-40°C to +80°C)