

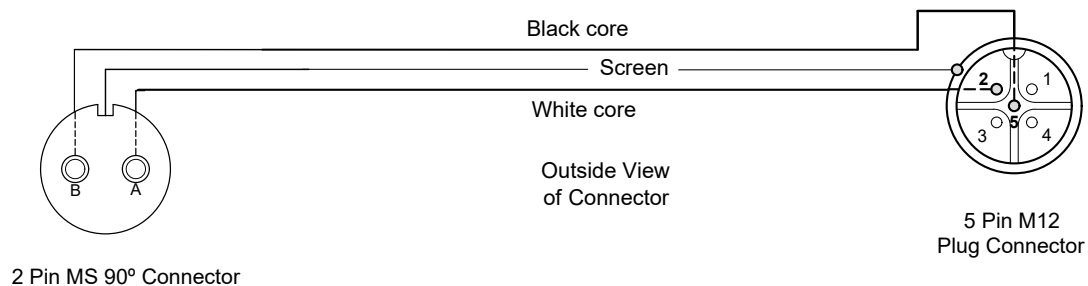


Connection Details of Cable Assembly

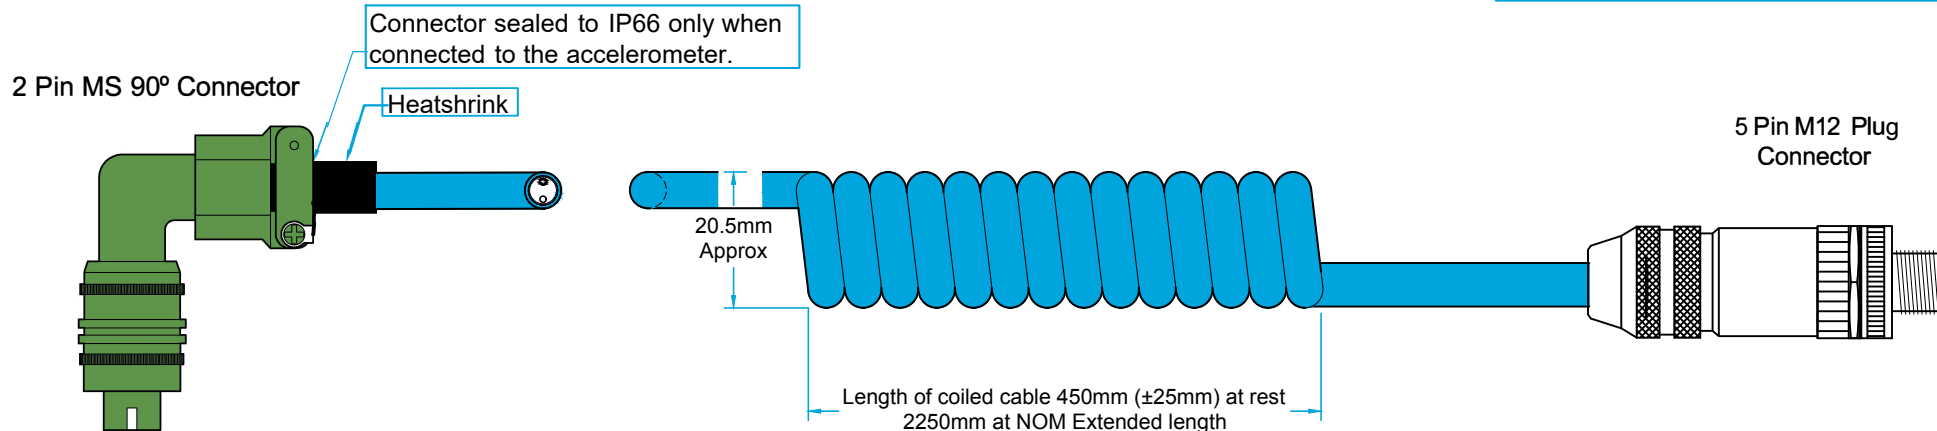

Inside View of Cable of C01-025 Polyurethane Screened Coiled Cable

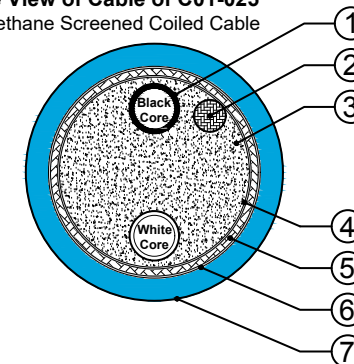

Materials of Cable: C01-025 Polyurethane Screened Coiled Cable			
Pos	Description	Overall Diameter	Remarks
1.	Tin plated copper conductor	1.02	24 AWG
2.	Screen wire of tin plated copper		24 AWG
3.	Poly filler insulation		
4.	Paper wrap insulation separator		
5.	Braided screen of tin plated copper		
6.	Paper wrap insulation separator		
7.	Polyurethane jacket	5.4mm (±0.1mm)	Non flame retardant, rated from -40°C to +80°C