

HS-421S Accelerometer



4-20mA velocity and AC acceleration output via Flame Retardant Cable

Key Features

- Unique output
- For use with PLC/DCS systems and data collectors
- Low smoke, halogen free cable

Industries

Building services, Pulp and Paper, Mining, Metals, Utilities, Automotive, Water, Pharmaceutical

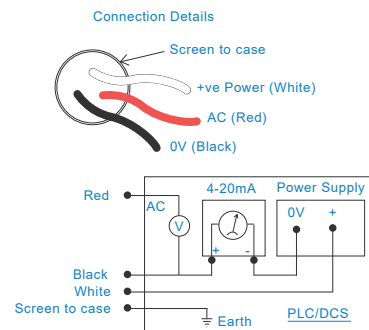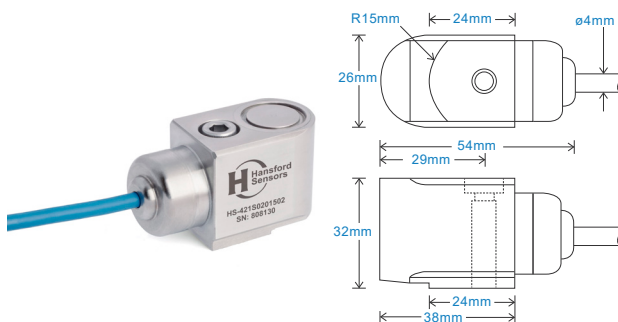

Technical Performance

Mounted Base Resonance	5kHz min
Velocity Ranges	see: 'How To Order' table $\pm 10\%$ Nominal 80Hz at 22°C
Frequency Response: 4-20mA	10Hz (600cpm) to 1kHz (60kcpm) $\pm 5\%$ - ISO10816
Frequency Response: AC	2Hz (120cpm) to 10kHz (600kcpm) $\pm 5\%$ - ISO10816
Isolation	Base isolated
Range	see: 'How To Order' table
Transverse Sensitivity	Less than 5%

Mechanical

Case Material	Stainless Steel
Sensing Element/Construction	PZT/Shear
Mounting Torque	8Nm
Mounting Bolt Provided	see: 'How To Order' table x 35mm long
Weight	185gms (nominal) body only
Maximum Cable Length	1000 metres
Standard Cable Length	5 metres
Screened Cable	Flame Retardant - length to be specified with order
Mounting Threads	see: 'How To Order' table


Electrical

Outputs	4-20mA DC current proportional to Range and AC acceleration
Bias Voltage	3 Volts DC (nominal)
Supply Voltage	15-30 Volts DC (for 4-20mA)
Settling Time	1 seconds
Output Impedance	Loop Resistance 600 Ohms max. at 24 Volts
Case Isolation	$>10^8$ Ohms at 500 Volts

Environmental

Operating Temperature Range	-25 to 90°C
Sealing	IP65
Maximum Shock	5000g
EMC	EN61326-1:2013


Typical Frequency Response (4-20mA signal)

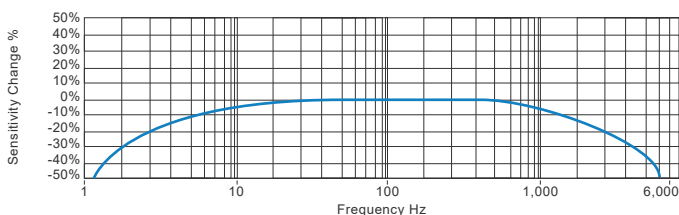

Applications

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, VAC, Spindles, Machine Tooling, Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)

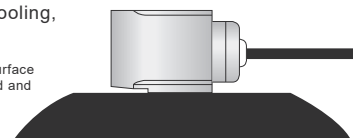

How To Order

Product Prefix HS - Hansford Sensors			Product Series 421 - Industrial Vibration Sensor			Cable Length (if integral cable) QXX - length specified in metres							
H	S	4	2	1	S	X	X	X	X	X	X	X	X
Extra Options (if required)			Velocity Range (RMS unless specified)			Sensitivity		Range		Cable/Connector		Mounting Threads	
F	-	Filtered	010	-	0-10 mm/sec	100mV/g		$\pm 80g$		01	- PUR	02	- 1/4-28" UNF Male
L	-	316L Stainless Steel	020	-	0-20 mm/sec	100mV/g		$\pm 80g$		03	- Braided	06	- M6 x 1mm Male
RT	-	Temperature Output PT100	025	-	0-25 mm/sec	100mV/g		$\pm 80g$		07	- Silicon	08	- M8 x 1.25mm Male
S	-	90° Side Exit	050	-	0-50 mm/sec	100mV/g		$\pm 80g$		15	- Flame Retardant		
T	-	Temperature Output	100	-	0-100 mm/sec	100mV/g		$\pm 80g$		52	- 3 Pin MS		
										54	- M12		



www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice
TS327.12

