

# HS-173I Premium ATEX Triaxial Accelerometer


## Three AC outputs via PUR cable with Protective Conduit

### Key Features

- Intrinsically Safe with European, USA and Australian approvals
- Output via three axes
- For use with data collector
- Protective Conduit

### Industries

Building services, Pulp and Paper, Mining, Metals, Utilities, Automotive, Water, Pharmaceutical

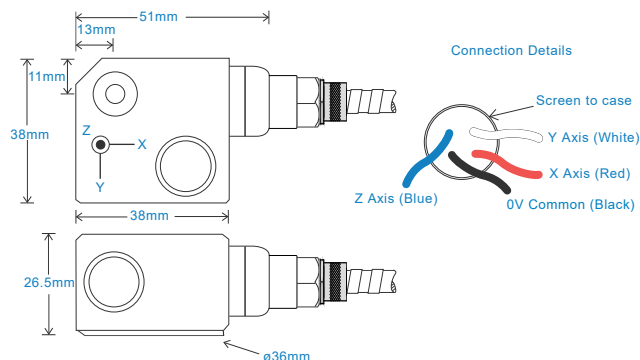

### Technical Performance

|                        |                                                                                                                                               |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| Mounted Base Resonance | see 'How To Order' table (nominal)                                                                                                            |
| Sensitivity            | see: 'How To Order' table $\pm 10\%$<br>Nominal 80Hz at 22°C per axes                                                                         |
| Frequency Response     | 2Hz (120cpm) to 10kHz (600kcpm) $\pm 5\%$<br>1.5Hz (90cpm) to 12kHz (720kcpm) $\pm 10\%$<br>0.8Hz (48cpm) to 15kHz (900kcpm) $\pm 3\text{dB}$ |
| Isolation              | Base isolated                                                                                                                                 |
| Range                  | see: 'How To Order' table                                                                                                                     |
| Transverse Sensitivity | Less than 5%                                                                                                                                  |

### Mechanical

|                              |                                         |
|------------------------------|-----------------------------------------|
| Case Material                | Stainless Steel                         |
| Sensing Element/Construction | PZT/Shear                               |
| Mounting Torque              | 8Nm                                     |
| Mounting Bolt Provided       | see: 'How To Order' table x 30mm long   |
| Weight                       | 235gms (nominal)                        |
| Maximum Cable Length         | See certificate                         |
| Standard Cable Length        | 5 metres                                |
| Screened Cable               | PUR - length to be specified with order |
| Mounting Threads             | see: 'How To Order' table               |
| Mounting Stud                | HS-AS226, HS-AS221 or HS-AS222          |
| Submersible Depth            | 100 metres max (10 bar)                 |


### Electrical

|                  |                           |
|------------------|---------------------------|
| Electrical Noise | 0.1mg max                 |
| Current Range    | 0.5mA to 8mA              |
| Bias Voltage     | 10 - 12 Volts DC          |
| Settling Time    | 1 second                  |
| Output Impedance | 200 Ohms max.             |
| Case Isolation   | $>10^8$ Ohms at 500 Volts |

### Environmental

|                             |                                     |
|-----------------------------|-------------------------------------|
| Operating Temperature Range | see: attached certification details |
| Sealing                     | IP68                                |
| Maximum Shock               | 5000g                               |
| EMC                         | EN61326-1:2013                      |


### Typical Frequency Response (at 100mV/g)

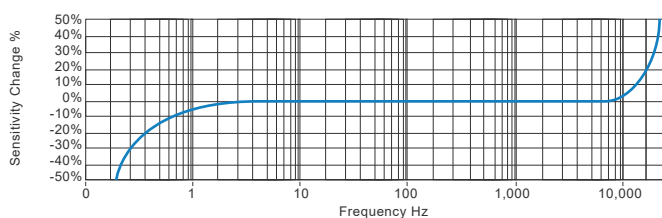

### Applications

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, VAC, Spindles, Machine Tooling, Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



### Certifications



This product is certified in accordance with  
**UL 60079-0, 6th Ed. Rev. July 26, 2013**  
**UL 60079-11, 6th Ed. Rev. September 6, 2013**  
**CAN/CSA C22.2 No. 60079-0:15 Rev. October 2015**  
**CAN/CSA C22.2 No. 60079-11:14**  
**UL 913, 8th Ed. Rev. October 16, 2015**



[www.hansfordsensors.com](http://www.hansfordsensors.com)  
[sales@hansfordsensors.com](mailto:sales@hansfordsensors.com)

We reserve the right to alter the specification of this product without prior notice

TS1055.6



# HS-173I Premium ATEX Triaxial Accelerometer

Three AC outputs via PUR cable with Protective Conduit

## Intrinsically Safe Requirements

|                                       |                                                                                                                                                                                                                                                           |                             |                                                                                                                                                                                                                                                                                                  |
|---------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Certificate details: Group II and III | IECExBAS 18.0082X<br>Baseefa18ATEX0130X<br>ⒺII 1GD<br>Ex ia II T6...T4<br>Ex ia IIIC T135°C Da<br>Ex ia IIIB T102°C...T131°C Da                                                                                                                           | Certified Temperature Range | Ex ia IIC T6 Ga (-55°C ≤ Ta ≤ +69°C) (Gas)<br>Ex ia IIC T4 Ga (-55°C ≤ Ta ≤ +104°C) (Gas)<br>Ex ia IIIB T102°C Da (-55°C ≤ Ta ≤ +69°C) (Dust)<br>Ex ia IIIB T131°C Da (-55°C ≤ Ta ≤ +98°C) (Dust)<br>Ex ia IIIC T135°C Da (-55°C ≤ Ta ≤ +70°C) (Dust)<br>Ex ia I Ma (-55°C ≤ Ta ≤ +104°C) (Dust) |
| Certificate details: Group I          | IECEX 18.0082X<br>Baseefa18ATEX0130X<br>ⒺI M 1<br>Ex ia I Ma<br>Ex ia IIIC T110°C...T145°C Da                                                                                                                                                             | Australia Approval Group I  | IECEX ExTC 18.0032X<br>Ex ia I Ma<br>(-55°C ≤ Ta ≤ +104°C)                                                                                                                                                                                                                                       |
| Terminal Parameters 10m of cable      | Ui = 28V, Ii = 93mA, Pi = 0.65W<br>Ci = 7.4nF<br>Li = 7.2μH                                                                                                                                                                                               | US/Canada Approvals         | Certificate No. SGSNA/19/BAS/00005<br>CI I, II, III, Div 1, 2 Gr A-G T*<br>CI I Zn 0 AEx ia IIC T6...T4 Ga<br>CI II Zn 20 AEx ia IIIC T135°C Da<br>Ex ia IIC T6...T4 Ga<br>Ex ia IIIC T135°C Da                                                                                                  |
| Terminal Parameters 92m of cable      | Ui = 28V, Ii = 93mA, Pi = 0.65W<br>Ci = 38.3nF<br>Li = 66μH                                                                                                                                                                                               |                             | Or                                                                                                                                                                                                                                                                                               |
| 500V Isolation                        | Units Will Pass A 500V Isolation Test                                                                                                                                                                                                                     |                             | CI I, II, III, Div 1, 2 Gr A-D G and F T*<br>CI I Zn 0 AEx ia IIC T6...T4 Ga<br>CI II Zn 20 AEx ia IIIC T135°C Da                                                                                                                                                                                |
| Standards Applied to Product          | EN IEC 60079-0:2018<br>EN 60079-11:2012<br>IEC 60079-0 Edition 7 2017<br>IEC 60079-11 Edition 6 2011                                                                                                                                                      |                             | CI II Zn 20 AEx ia IIIB T102°C...T131°C Da<br>Ex ia IIC T6...T4 Ga<br>Ex ia IIIC T135°C Da<br>Ex ia IIIB T102°C...T131°C Da                                                                                                                                                                      |
| Barrier                               | 1 x Pepperl + Fuchs Galvanic Isolator<br>KFD2-VR4-Ex1.26 (BAS02ATEX7206)<br>1 x MTL Zener Barrier MTL7728+ (BAS01ATEX7217)<br>or Pepperl + Fuchs Zener Barrier<br>Z728 (BAS01ATEX7005) or any other barrier that<br>conforms with the terminal parameters | Control Drawing             | M06-088-A                                                                                                                                                                                                                                                                                        |

Special conditions of use: When a sensor is supplied with integral cable, this must be terminated in an enclosure providing at least degree of protection IP20.

Note: If the equipment is to be used in unusual environments or aggressive substances are likely to be encountered, contact the manufacturer to discuss suitability.

## How To Order

| Product Prefix<br>HS - Hansford Sensors                                                                                                                                                                            | Product Series<br>173I - Premium Intrinsically Safe Triaxial Industrial Vibration Sensor |                                                                                                                |   |                                                          |   |                                                                                                                                              |   |                                                         |   |                                                                                        |   |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|---|----------------------------------------------------------|---|----------------------------------------------------------------------------------------------------------------------------------------------|---|---------------------------------------------------------|---|----------------------------------------------------------------------------------------|---|
| H                                                                                                                                                                                                                  | S                                                                                        | 1                                                                                                              | 7 | 3                                                        | I | X                                                                                                                                            | X | X                                                       | X | X                                                                                      | X |
| Extra Options (if required)<br>A - Australia (Group I)<br>G - SGS (US/Canada Approval)<br>I - Intrinsically Safe (Group II)<br>L - 316L Stainless Steel<br>M - Mining (Group I)<br>Y - 5% tolerance on sensitivity |                                                                                          | Sensitivity<br>010 - 10mV/g<br>030 - 30mV/g<br>050 - 50mV/g<br>100 - 100mV/g<br>250 - 250mV/g<br>500 - 500mV/g |   | Range<br>±800g<br>±250g<br>±160g<br>±80g<br>±32g<br>±16g |   | Resonant Frequency<br>20kHz (1,200kcps)<br>19kHz (1,140kcps)<br>18kHz (1,080kcps)<br>17kHz (1,020kcps)<br>16kHz (960kcps)<br>15kHz (900kcps) |   | Cable/Connector<br>01C - PUR with<br>Protective Conduit |   | Mounting Threads<br>02 - ¼-28" UNF Male<br>06 - M6 x 1mm Male<br>08 - M8 x 1.25mm Male |   |