

HS-150IS Premium Intrinsically Safe Accelerometer


AC acceleration output via 4 Core PUR Cable with Removable Stainless Steel Conduit

Key Features

- Intrinsically Safe with European, Indiana, USA and Australian approval
- Side entry for easy access
- Removable Stainless Steel Conduit

Industries


Building services, Pulp and Paper, Mining, Metals, Utilities, Automotive, Water, Pharmaceutical

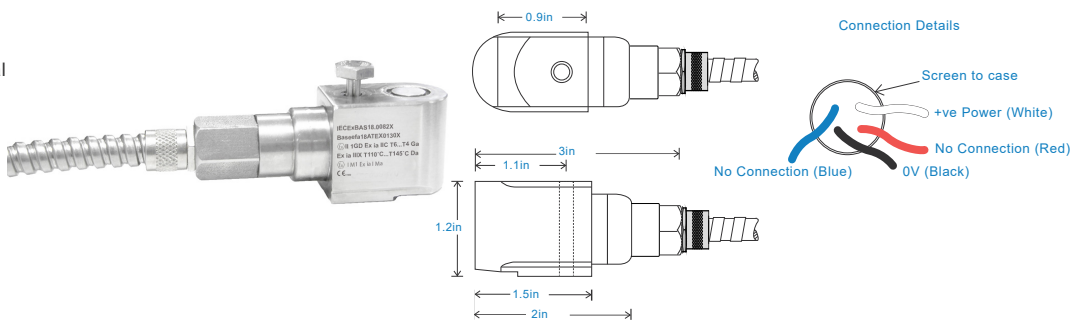

Technical Performance		Mechanical	
Mounted Base Resonance	see 'How To Order' table (nominal)	Case Material	Stainless Steel
Sensitivity	see: 'How To Order' table $\pm 10\%$ Nominal 80Hz at 72°F	Sensing Element/Construction	PZT/Shear
Frequency Response	120cpm (2Hz) to 600kcpm (10kHz) $\pm 5\%$ 90cpm (1.5Hz) to 720kcpm (12kHz) $\pm 10\%$ 48cpm (0.8Hz) to 900kcpm (15kHz) $\pm 3\text{dB}$	Mounting Torque	5.9ft. lbs
Isolation	Base isolated	Mounting Bolt provided	see: 'How To Order' table x 1.4in long
Range	see: 'How To Order' table	Weight	7.2 oz. (nominal) body only
Transverse Sensitivity	Less than 5%	Maximum Cable Length	See certificate
		Standard Cable Length	16 ft.
		Screened Cable	PUR - length to be specified with order
		Mounting Threads	see: 'How To Order' table

Electrical		Environmental	
Excitation Voltage:	18-30Volts DC	Operating Temperature Range	see: attached certification details
Electrical Noise	0.1mg max	Sealing	IP68
Current Range	0.5mA to 8mA	Maximum Shock	5000g
Bias Voltage	10 - 12 Volts DC	EMC	EN61326-1:2013
Settling Time	2 seconds		
Output Impedance	200 Ohms max.		
Case Isolation	$>10^8$ Ohms at 500 Volts		


Typical Frequency Response (at 100mV/g)

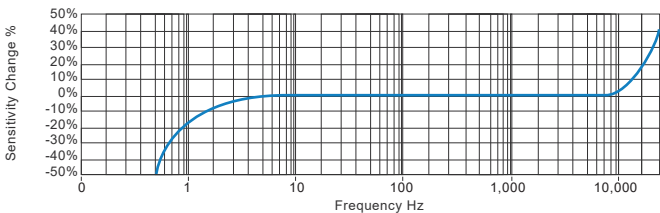

Applications

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, VAC, Spindles, Machine Tooling, Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)

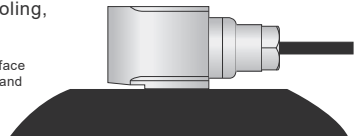

Certifications



This product is certified in accordance with
UL 60079-0, 6th Ed. Rev. July 26, 2013
UL 60079-11, 6th Ed. Rev. September 6, 2013
CAN/CSA C22.2 No. 60079-0:15 Rev. October 2015
CAN/CSA C22.2 No. 60079-11:14
UL 913, 8th Ed. Rev. October 16, 2015



www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice

TS1120U.3



HS-150IS Premium Intrinsically Safe Accelerometer


AC acceleration output via 4 Core PUR Cable with Removable Stainless Steel Conduit

Intrinsically Safe Requirements			
Sensor Maximum Cable Length	Up to 92 metres	Certified Temperature Range	Ex ia IIC T6 Ga (-55°C ≤ Ta ≤ +57°C) (Gas) Ex ia IIC T4 Ga (-55°C ≤ Ta ≤ +103°C) (Gas)
Certificate details: Group I	IECEX 18.0082X		Ex ia IIIC T110°C Da (-55°C ≤ Ta ≤ +57°C) (Dust)
	Baseefa18ATEX0130X		Ex ia IIIC T135°C Da (-55°C ≤ Ta ≤ +70°C) (Dust)
	ⒺI M 1		Ex ia IIIC T145°C Da (-55°C ≤ Ta ≤ +92°C) (Dust)
	Ex ia I Ma		Ex ia I Ma (-55°C ≤ Ta ≤ +103°C) (Mining)
Certificate details: Group II and III	IECEX 18.0082X	Australian Approval Group I	IECEX ExTC 18.0032X
	Baseefa18ATEX0130X		Ex ia I Ma
	ⒺII 1GD		(-55°C ≤ Ta ≤ +104°C)
	Ex ia IIC T6...T4 Ga		
Terminal Parameters 10m of cable	Ui = 28V, Ii = 93mA, Pi = 0.65W	US/Canada Approvals	Certificate No. SGSNA/19/BAS/00005
	Ci = 5.0nF		CI I, II, III, Div 1, 2 Gr A-G T*
	Li = 7.2µH		CI I Zn 0 AEx ia IIC T6...T4 Ga
			CI II Zn 20 AEx ia IIIC T110°C...T145°C Da
Terminal Parameters 92m of cable	Ui = 28V, Ii = 93mA, Pi = 0.65W	Control Drawing	CI II Zn 20 AEx ia IIIB T110°C...T145°C Da
	Ci = 35.9nF		Ex ia IIC T6...T4 Ga
	Li = 66µH		Ex ia IIIC T110°C...T145°C
500V Isolation	Units Will Pass A 500V Isolation Test		M06-083-A Overbraided Cable
			M06-084-A PUR Cable
			M06-085-A Silicone Cable
			M06-086-A FR PUR Cable
Standards Applied to Product	EN IEC 60079-0:2018 EN 60079-11:2012	Barrier	M06-087-A Various Cables (HS-150IT Only)
			1 x Pepperl + Fuchs Galvanic Isolator
			KFD2-VR4-Ex1.26 (BAS02ATEX7206)
	IEC 60079-0 Edition 7 2017 IEC 60079-11 Edition 6 2011		1 x MTL Zener Barrier MTL7728+ (BAS01ATEX7217)
			or Pepperl + Fuchs Zener Barrier
			Z728 (BAS01ATEX7005) or any other barrier that
			conforms with the terminal parameters

Special conditions of use: When a sensor is supplied with integral cable, this must be terminated in an enclosure providing at least degree of protection IP20.

Note: If the equipment is to be used in unusual environments or aggressive substances are likely to be encountered, contact the manufacturer to discuss suitability.

How To Order

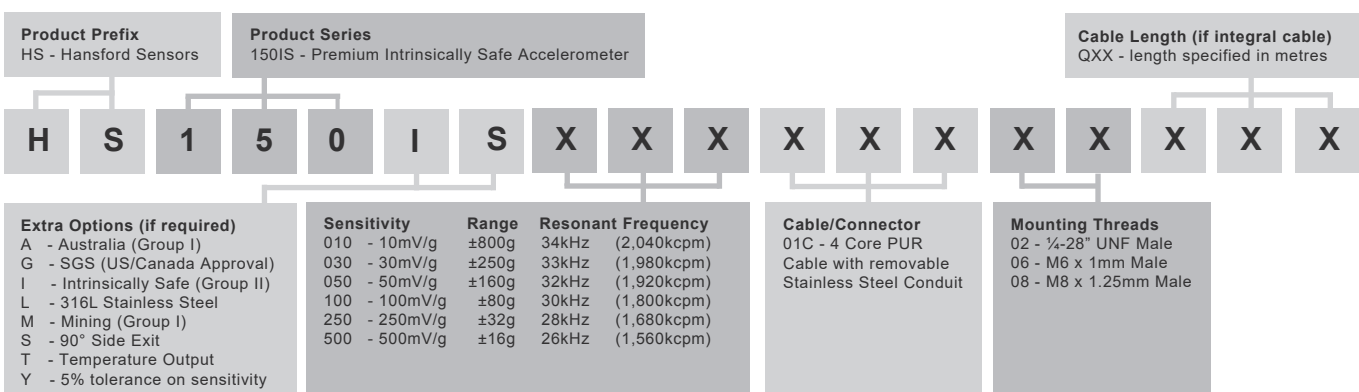

www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice
TS1120U.3

