

HS-420 Accelerometer



4-20mA velocity output via Flame Retardant Cable for use with Terminal Head

Key Features

- For use with Terminal Head
- Customizable features

Industries

Building services, Pulp and Paper,
Mining, Metals, Utilities, Automotive,
Water, Pharmaceutical

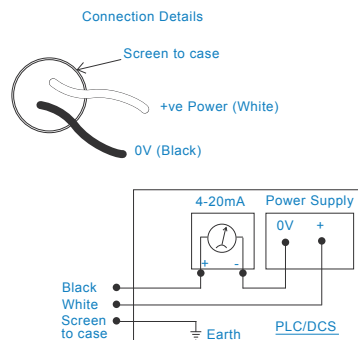

Technical Performance

Mounted Base Resonance	5kHz min
Velocity Ranges	see: 'How To Order' table $\pm 10\%$ Nominal 80Hz at 72°F
Frequency Response	600cpm (10Hz) to 60kcpm (1kHz) $\pm 5\%$ - ISO10816
Isolation	Base isolated
Range	50g peak
Transverse Sensitivity	Less than 5%

Mechanical

Case Material	Stainless Steel
Sensing Element/Construction	PZT/Compression
Mounting Torque	5.9ft. lbs
Weight	3.5 oz. (nominal)
External Cable Length	site cable up to 3,280 ft.
Integral Cable Length	up to 12in
Cable Connections	Screw Terminals
Mounting Threads	see: 'How To Order' table


Electrical

Current Output	4-20mA DC proportional to Velocity Range
Supply Voltage	15-30 Volts DC (for 4-20mA)
Settling Time	2 seconds
Output Impedance	Loop Resistance 600 Ohms max. at 24 Volts
Case Isolation	$>10^8$ Ohms at 500 Volts

Environmental

Operating Temperature Range	-13 to 194°F
Sealing	IP65
Maximum Shock	5000g
EMC	EN61326-1:2013


Typical Frequency Response

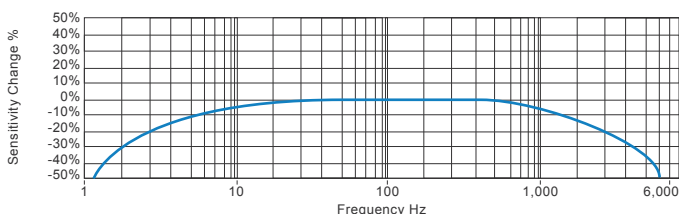

Applications

Fans, Motors, Pumps, Compressors,
Centrifuges, Conveyors, Air Handlers,
Gearboxes, Rolls, Dryers, Presses,
Cooling, VAC, Spindles, Machine Tooling,
Process Equipment

Vibration sensor should be firmly fixed to a flat surface
(spot face surface may be needed to be produced and
cable anchored to sensor body.)



How To Order

Product Prefix		Product Series									
HS - Hansford Sensors		420 - Industrial Vibration Sensor									
H	S	4	2	0	X	X	X	X	X	X	X
Extra Options (If required)						Velocity Range (RMS unless specified)			Cable/Connector		Mounting Threads
L - 316L Stainless Steel T - Temperature Output U - Imperial Range UP - Imperial Peak Range UPP - Imperial Peak to Peak Range						012 - 1/2 IPS 025 - 1 IPS 050 - 2 IPS 100 - 4 IPS			12 - 1/2" NPT and Flame Retardant cable for Terminal Head*		01 - 1/4-28" UNF Female 02 - 1/4-28" UNF Male 05 - Quick Fit Female 06 - M6 x 1mm Male 08 - M8 x 1.25mm Male 10 - M10 x 1.5mm Male

*HS-AA042 or HS-AA052 Terminal Head to be purchased separately



www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice
TS1160U.H

