

# HS-100S Accelerometer


AC acceleration output via 4 Core PUR Cable with Removable Stainless Steel Conduit

## Key Features

- For use with data collector
- Side entry for easy access
- Customisable features

## Industries

Building services, Pulp and Paper, Mining, Metals, Utilities, Automotive, Water, Pharmaceutical

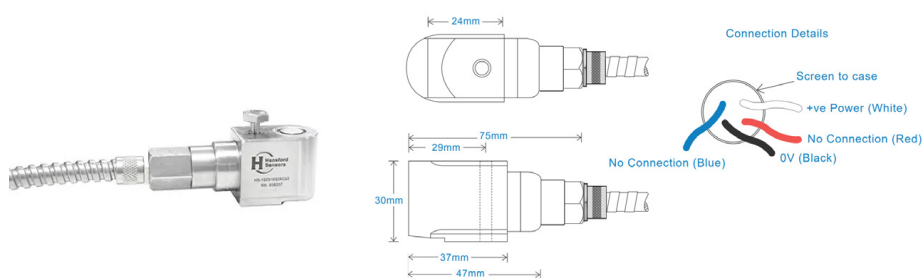

## Technical Performance

Mounted Base Resonance	see 'How To Order' table (nominal)
Sensitivity	see: 'How To Order' table $\pm 10\%$ Nominal 80Hz at 22°C
Frequency Response	2Hz (120cpm) to 10kHz (600kcpm) $\pm 5\%$ 1.5Hz (90cpm) to 12kHz (720kcpm) $\pm 10\%$ 0.8Hz (48cpm) to 15kHz (900kcpm) $\pm 3\text{dB}$
Isolation	Base isolated
Range	see: 'How To Order' table
Transverse Sensitivity	Less than 5%

## Mechanical

Case Material	Stainless Steel
Sensing Element/Construction	PZT/Compression
Mounting Torque	8Nm
Mounting Bolt provided	see: 'How To Order' table x 35mm long
Weight	205gms (nominal) body only
Maximum Cable Length	1000 metres
Standard Cable Length	5 metres
Screened Cable	PUR - length to be specified with order
Screened Cable Assembly	see: <a href="http://www.hansfordsensors.com">www.hansfordsensors.com</a> for options
Connector	n/a
Mounting Threads	see: 'How To Order' table x 30mm long
Submersible Depth	n/a


## Electrical

Excitation Voltage:	18-30Volts DC
Electrical Noise	0.1mg max
Current Range	0.5mA to 8mA
Bias Voltage	10 - 12 Volts DC
Settling Time	2 seconds
Output Impedance	200 Ohms max
Case Isolation	$>10^8$ Ohms at 500 Volts

## Environmental

Operating Temperature Range	-30 to 90°C
Sealing	IP68
Maximum Shock	5000g
EMC	EN61326-1:2013


## Typical Frequency Response (at 100mV/g)

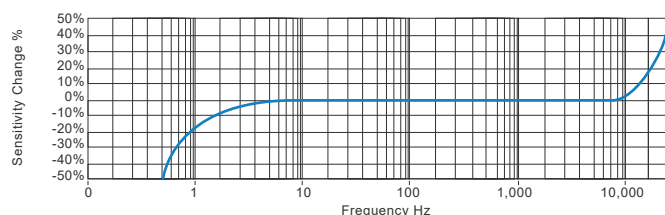

## Applications

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, VAC, Spindles, Machine Tooling, Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body).

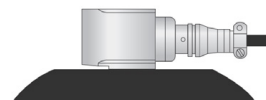

## How To Order

Product Prefix	Product Series										
HS - Hansford Sensors	100 - Industrial Vibration Sensor	H	S	1	0	0	S	X	X	X	X
Extra Options (If required)	Sensitivity	Range	Resonant Frequency	Cable/Connector	Mounting Threads						
F - Filtered	010 - 10mV/g	$\pm 800\text{g}$	27kHz (1,620kcpm)	01C - 4 Core PUR Cable with removable Stainless Steel Conduit	02 - 1/4-28" UNF Male						
I - Intrinsically Safe	030 - 30mV/g	$\pm 250\text{g}$	25kHz (1,500kcpm)	07C - 3 Core Silicon Cable with removable Stainless Steel Conduit	06 - M6 x 1mm Male						
RT - Temperature Output PT110	050 - 50mV/g	$\pm 160\text{g}$	23kHz (1,380kcpm)		08 - M8 x 1.25mm Male						
T - Temperature Output	100 - 100mV/g	$\pm 80\text{g}$	21kHz (1,260kcpm)								
Y - 5% tolerance on sensitivity	250 - 250mV/g	$\pm 32\text{g}$	19kHz (1,140kcpm)								
	500 - 500mV/g	$\pm 16\text{g}$	17kHz (1,020kcpm)								