
## Connection Details of Cable Assembly

2 Pin MS Pin A = White to 8 Pin ODU Pin 8
2 Pin MS Pin B = Black to 8 Pin ODU Pin 7

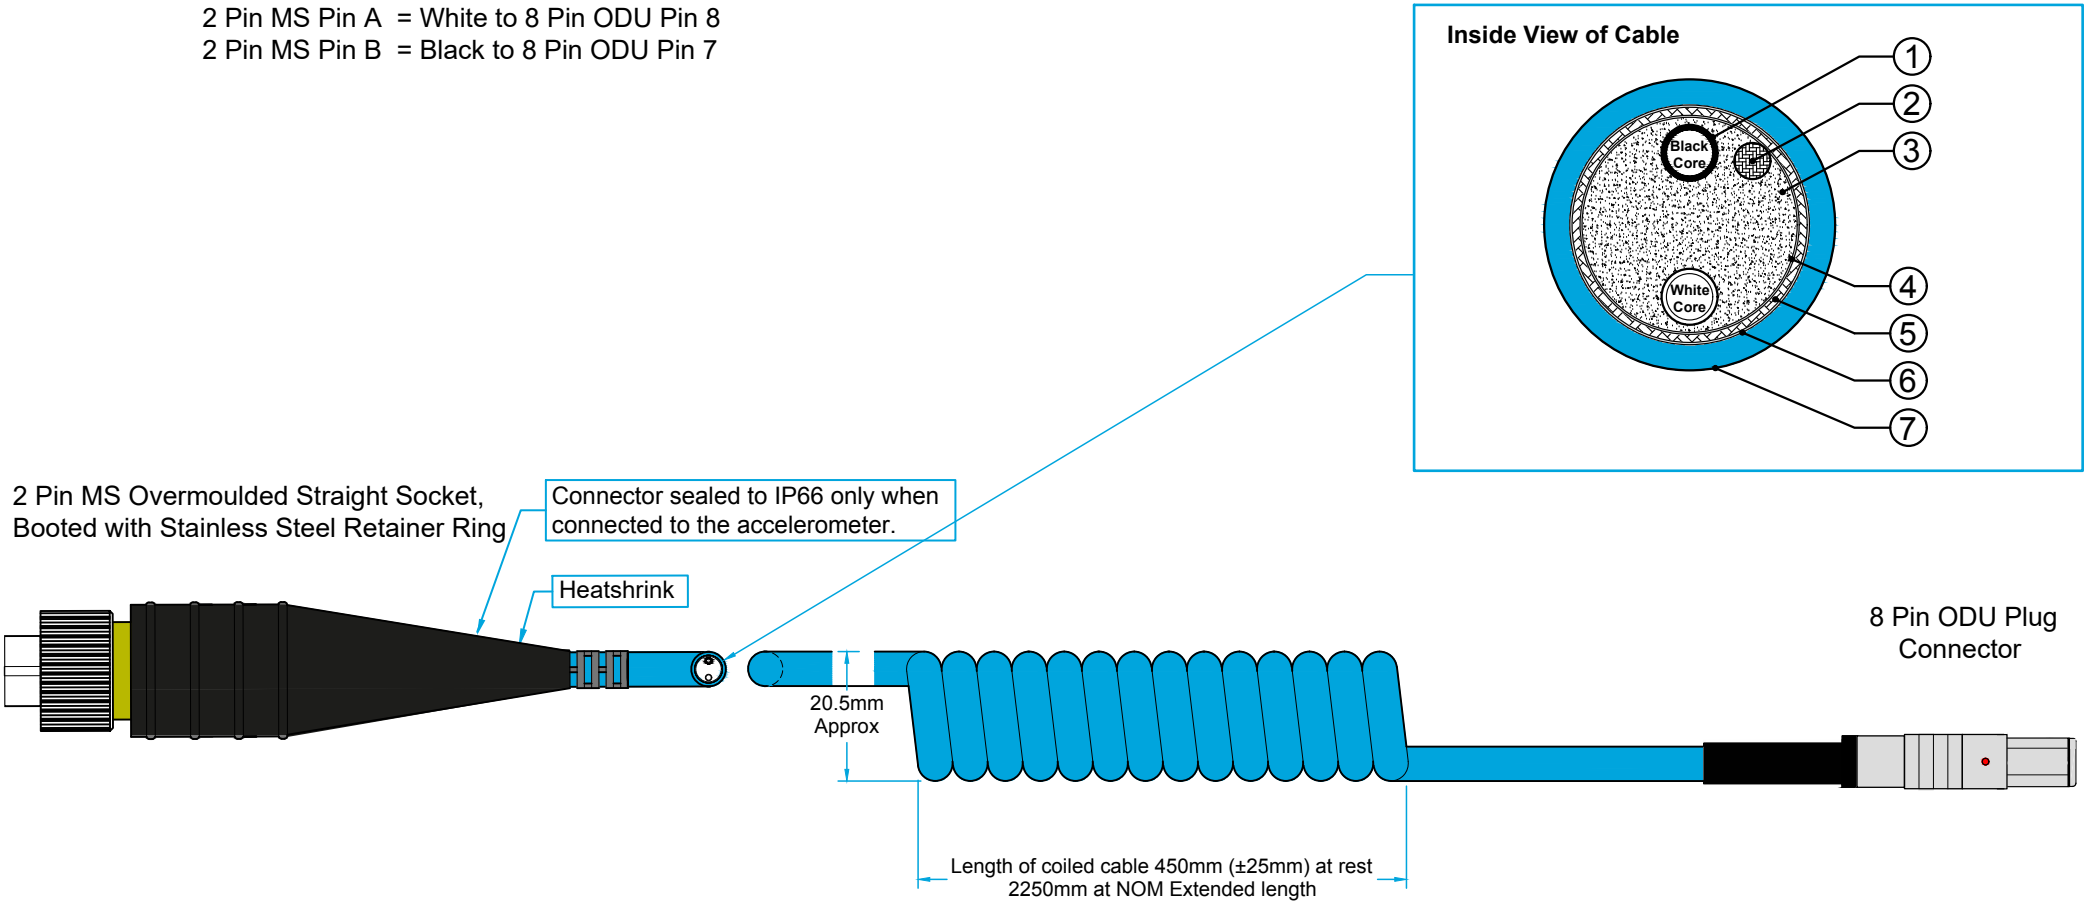


| **Materials of Cable: C01-025** Polyurethane Screened Coiled Cable | | | |
|---|---|---|---|
| **Pos** | **Description** | **Overall Diameter** | **Remarks** |
| 1. | Tin plated copper conductor | 1.02 | 24 AWG |
| 2. | Screen wire of tin plated copper | | 24 AWG |
| 3. | Poly filler insulation | | |
| 4. | Paper wrap insulation seperator | | |
| 5. | Braided screen of tin plated copper | | |
| 6. | Paper wrap insulation seperator | | |
| 7. | Polyurethane jacket | 5.4mm (±0.1mm) | Non flame retardant, rated from -40°C to +80°C |


Hansford Sensors
Excellence in Vibration Monitoring
Tel: +44(0) 845 680 1957
Fax: +44(0) 845 680 1958
Email: sales@hansfordsensors.com
Web: www.hansfordsensors.com