
Connection Details of Cable Assembly

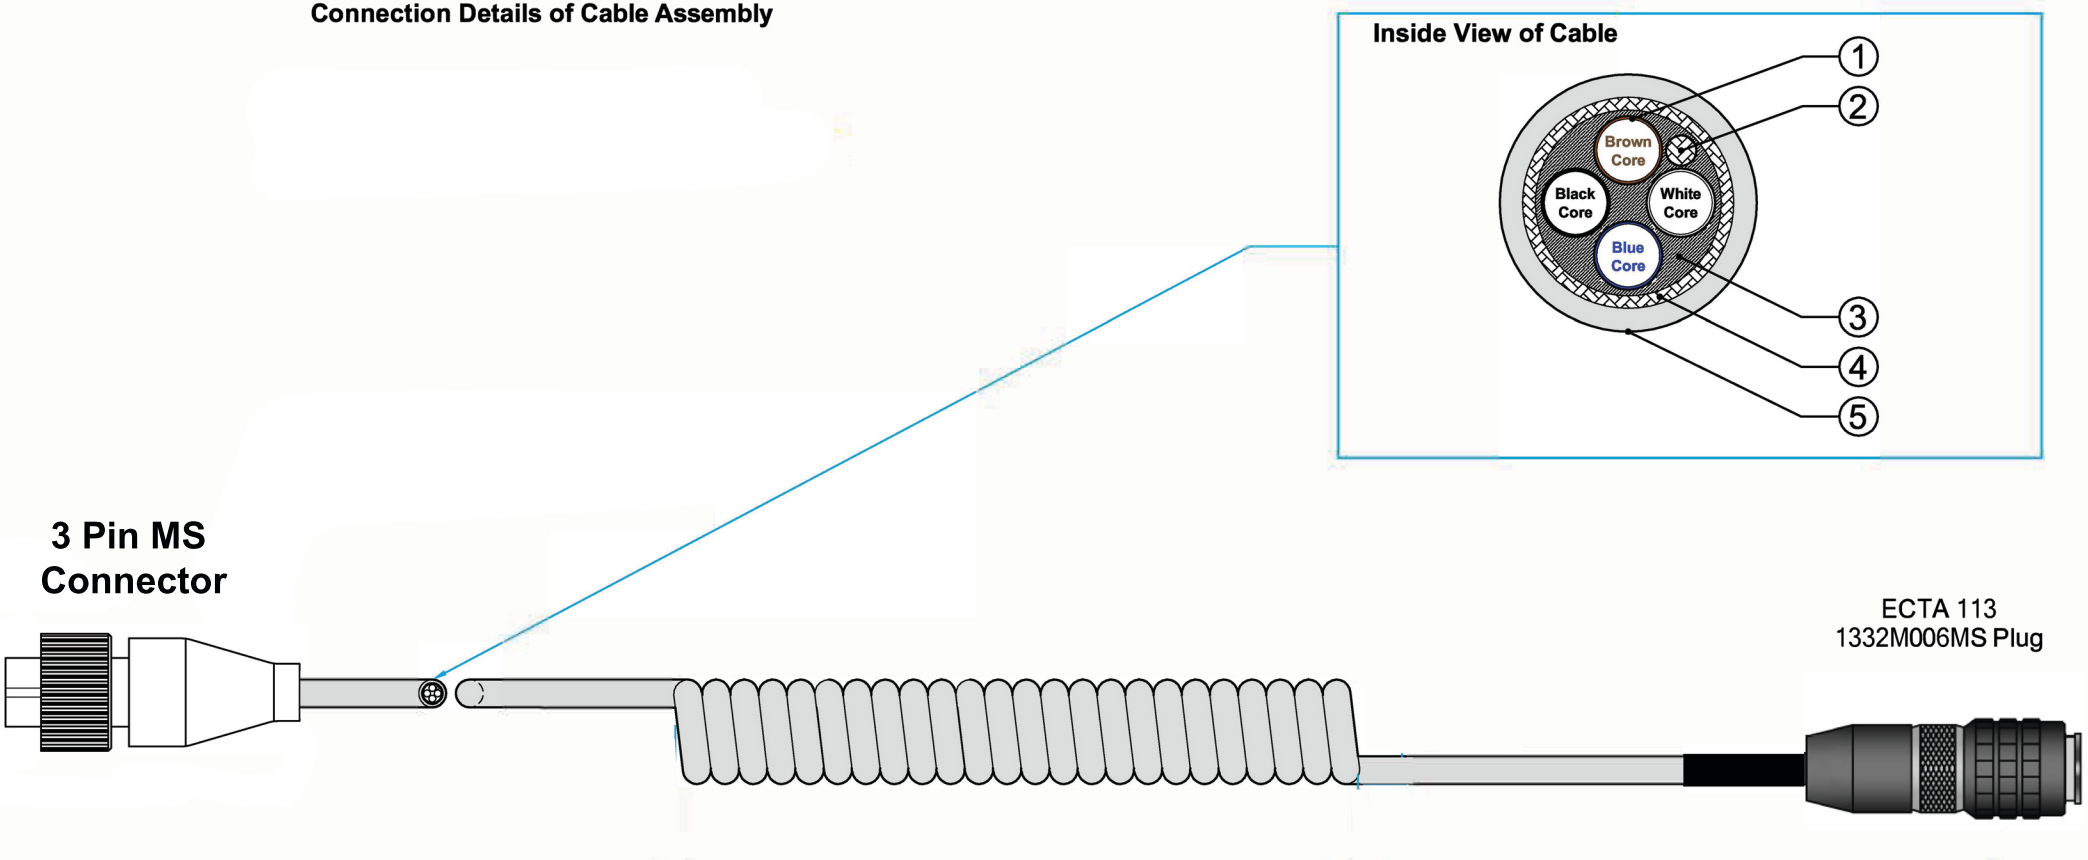

Materials of Cable: C01-048 Screened PUR Coiled Cable				
Pos	**Description**	**Dimension**	**Overall Diameter**	**Remarks**
Cable description: LiF9YHC11YH 4 x 0.34mm2 with drain wire qualified for drag chains acc. to UL/CSA 20233		Bending radius	min.10 x outer-Ø	Moving
			min. 5 x outer-Ø	Fixed installation
1.	Conductor, bare soft copper wire		0.10mm	acc. to VDE 0295, cl 6
2.	Screen wire, tinned copper		0.20mm	
3.	Stranding, 4 cores surrounding a woollen inner core			Lengh of lay approx 43mm drain wire
4.	Screen, tinned copper			Coverage: 84% min
5.	Outer sheath, Polyether-Polyurethane PUR11Y Flame retardant acc. to VDE 0472, Part 804/B Oil resistant acc. to VDE 0472, Part 803 Halogen free, free of silicone, seawater-resistant		5.9 ±0,2mm	Grey similiar to RAL7040
6.	Weight of Cable.		170 Grams	

Technical Data of Cable		
Technical Data	**Values at 20°C**	**Unit**
Resistance	≤57	Ω / km
Test voltage	2	KV
Normal voltage	300	V
Inductance	0.7	µH/m
Capacitance	Parallel wires: 66.7	pF/m
	Nonparallel wires: 63.1	
	Wire/screen: 120.0	
Temperature range	-40°C bis + 80°C	Moving
	-50°C bis + 80°C	Fixed installation

Hansford Sensors
Excellence in Vibration Monitoring
Tel: +44(0) 845 680 1957
Fax: +44(0) 845 680 1958
Email: sales@hansfordsensors.com
Web: www.hansfordsensors.com