
Connection Details of Cable Assembly

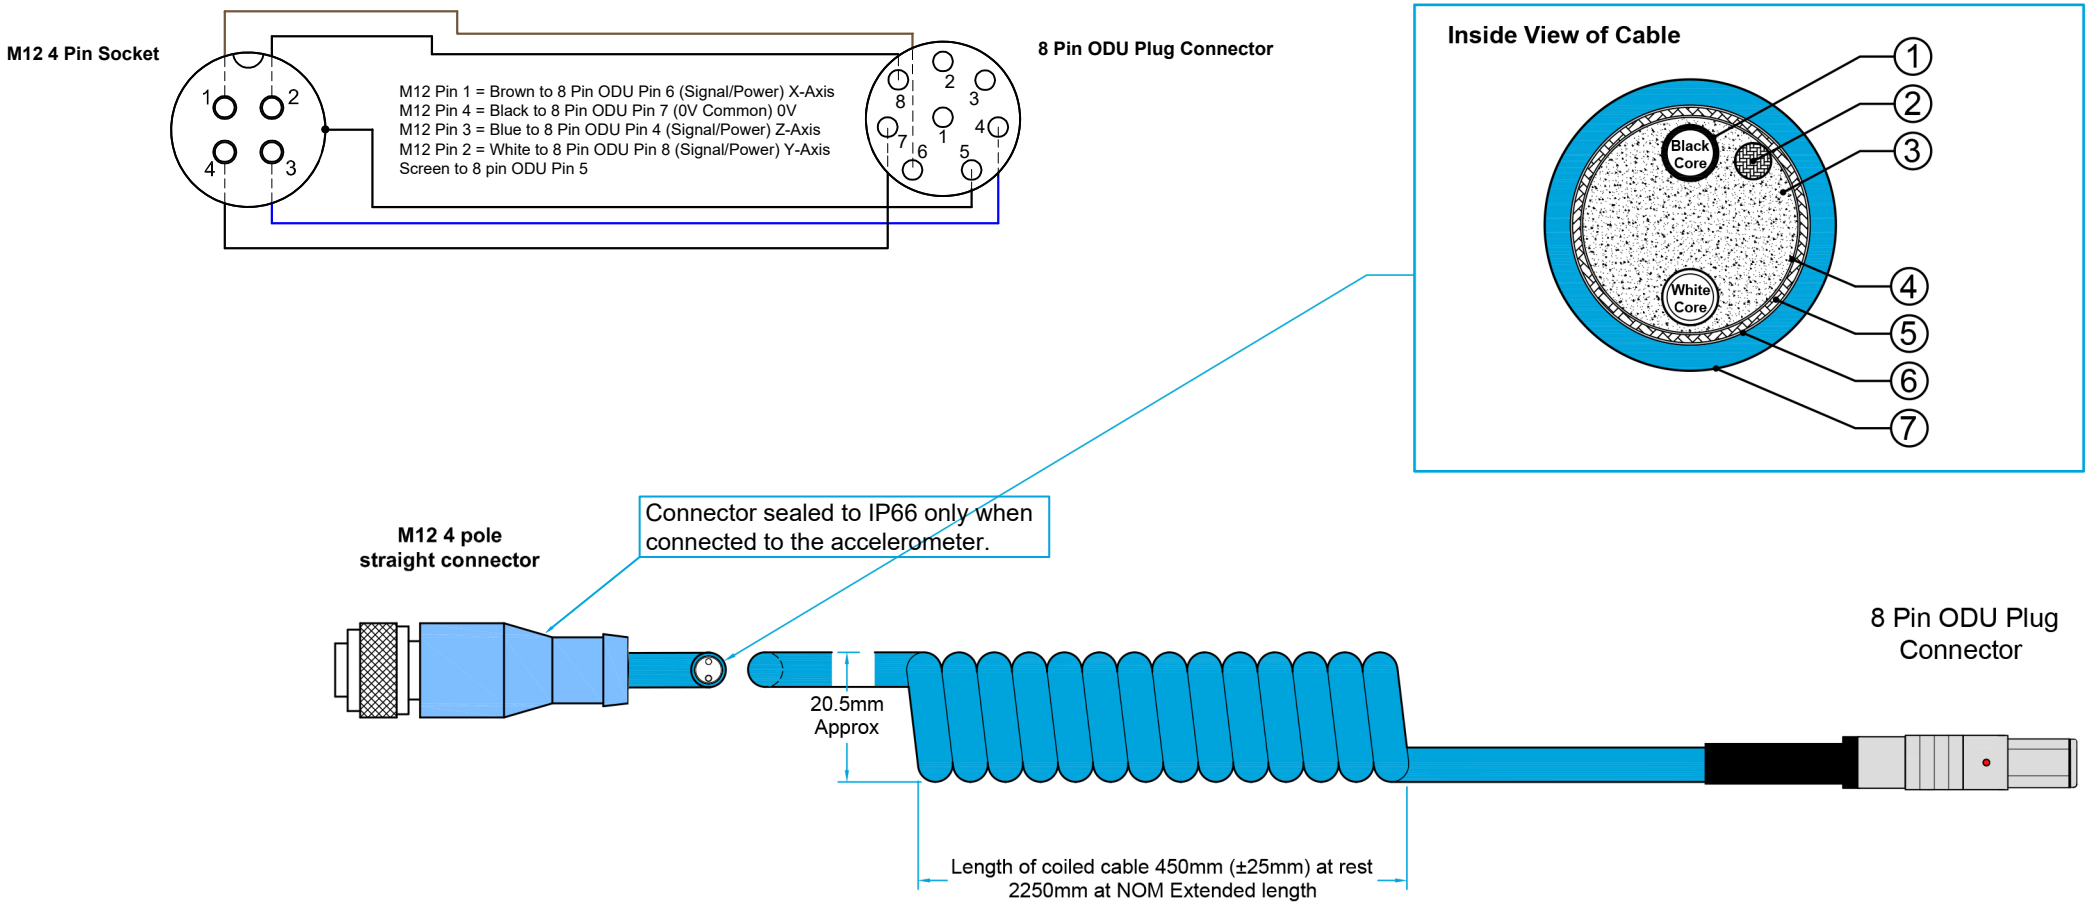

Materials of Cable: C01-025 Polyurethane Screened Coiled Cable			
Pos	**Description**	**Overall Diameter**	**Remarks**
1.	Tin plated copper conductor	1.02	24 AWG
2.	Screen wire of tin plated copper		24 AWG
3.	Poly filler insulation		
4.	Paper wrap insulation seperator		
5.	Braided screen of tin plated copper		
6.	Paper wrap insulation seperator		
7.	Polyurethane jacket	5.4mm (±0.1mm)	Non flame retardant, rated from -40°C to +80°C

Hansford Sensors
Excellence in Vibration Monitoring
Tel: +44(0) 845 680 1957
Fax: +44(0) 845 680 1958
Email: sales@hansfordsensors.com
Web: www.hansfordsensors.com