


## AC acceleration output via PUR Cable


- For use with data collector
- Side entry for easy access
- Filtered output

Building services, Pulp and Paper,  
Mining, Metals, Utilities, Automotive,  
Water, Pharmaceutical

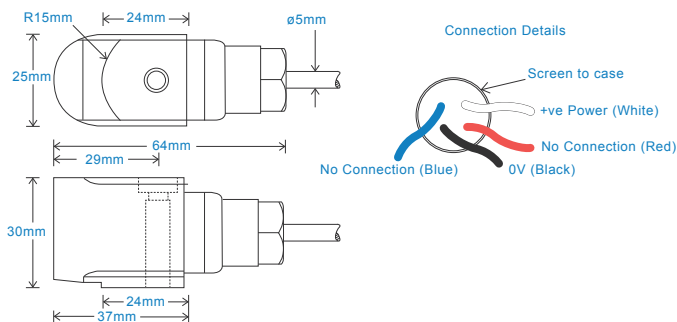


Technical Performance		Mechanical	
Mounted Base Resonance	see 'How To Order' table (nominal)	Case Material	Stainless Steel
Sensitivity	see: 'How To Order' table $\pm 10\%$	Sensing Element/Construction	PZT/Compression
	Nominal 80Hz at 22°C	Mounting Torque	8Nm
Frequency Response	1.5Hz (90cpm) to 10kHz (600kcpm) $\pm 5\%$	Mounting Bolt provided	see: 'How To Order' table x 30mm long
	0.5Hz (30cpm) to 12kHz (720kcpm) $\pm 10\%$	Weight	185gms (nominal) body only
	0.2Hz (12cpm) to 15kHz (900kcpm) $\pm 3\text{dB}$	Maximum Cable Length	1000 metres
Isolation	Base isolated	Standard Cable Length	5 metres
Range	see: 'How To Order' table	Screened Cable	PUR - length to be specified with order
Transverse Sensitivity	Less than 5%	Mounting Threads	see: 'How To Order' table
		Submersible Depth	100 metres max (10 bar)

Electrical		Environmental	
Excitation Voltage	18-30Volts DC	Operating Temperature Range	-30 to 90°C
Electrical Noise	0.1mg max	Sealing	IP68
Current Range	0.5mA to 8mA	Maximum Shock	5000g
Bias Voltage	10 - 12 Volts DC	EMC	EN61326-1:2013
Settling Time	2 seconds		
Output Impedance	200 Ohms max.		
Case Isolation	>10 <sup>8</sup> Ohms at 500 Volts		

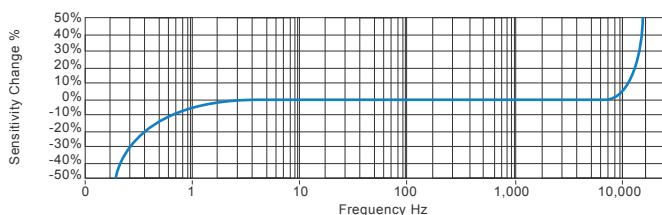

Fans, Motors, Pumps, Compressors,  
Centrifuges, Conveyors, Air Handlers,  
Gearboxes, Rolls, Dryers, Presses,  
Cooling, VAC, Spindles, Machine Tooling,  
Process Equipment

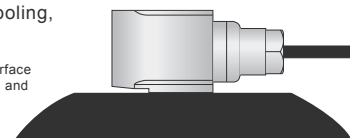

Product Prefix HS - Hansford Sensors		Product Series 100 - Industrial Vibration Sensor				Cable Length QXX - length specified in metres									
H	S	1	0	0	S	F	X	X	X	X	X	X	X	X	X
<b>Extra Options (if required)</b> F - Filtered L - 316L Stainless Steel RT - Temperature Output PT100 S - 90° Side Exit T - Temperature Output Y - 5% tolerance on sensitivity		<b>Sensitivity</b> 010 - 10mV/g 030 - 30mV/g 050 - 50mV/g 100 - 100mV/g 250 - 250mV/g 500 - 500mV/g		<b>Range</b> ±800g ±250g ±160g ±80g ±32g ±16g		<b>Resonant Frequency</b> 27kHz (1,620kcpm) 25kHz (1,500kcpm) 23kHz (1,380kcpm) 21kHz (1,260kcpm) 19kHz (1,140kcpm) 17kHz (1,020kcpm)		<b>Cable/Connector</b> 01 - PUR 02 - Braided 07 - Silicon 08 - Flame Retardant 50 - 2 Pin MS 54 - M12		<b>Mounting Threads</b> 02 - ¼-28" UNF Male 06 - M6 x 1mm Male 08 - M8 x 1.25mm Male					



www.hansfordsensors.com  
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice

TS192.7

