
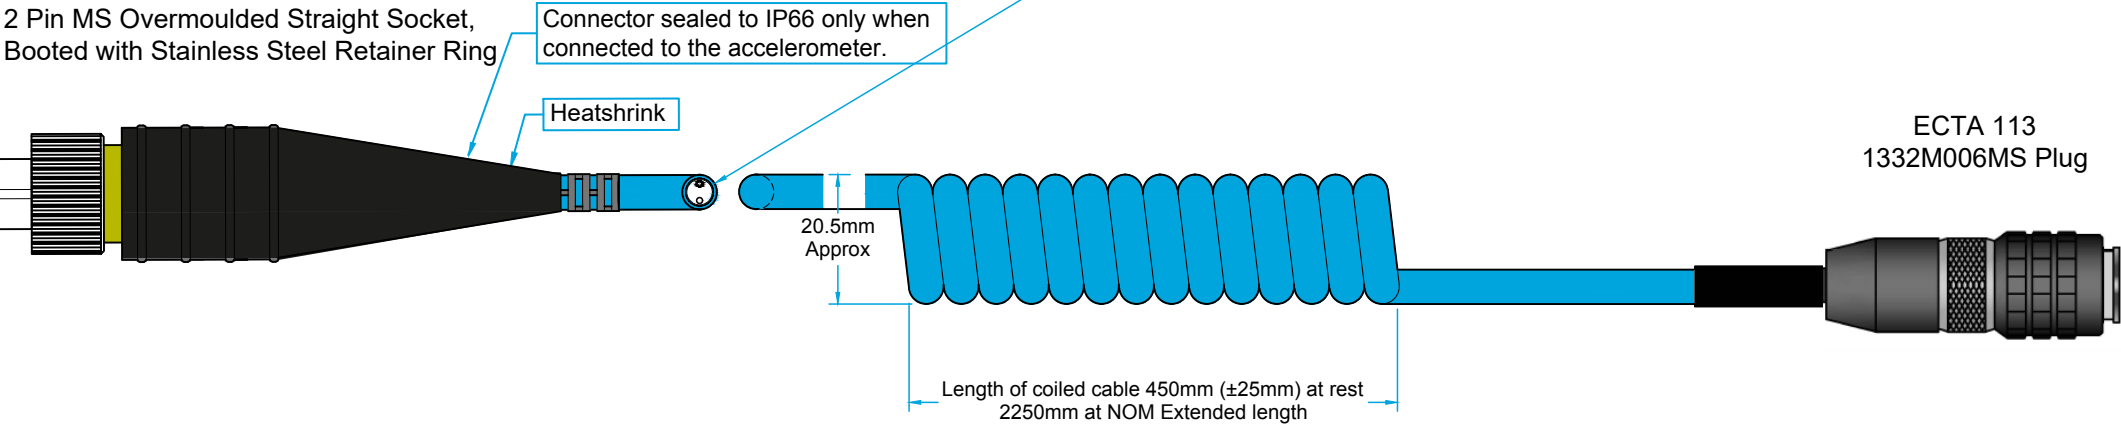


Connection Details of Cable Assembly

2 Pin MS Pin A = White to ECTA 113 Pin C
2 Pin MS Pin B = Black to ECTA 113 Pin B
Screen Drain Wire connected to 2 Pin MS Pin B and ECTA 113 Pin B

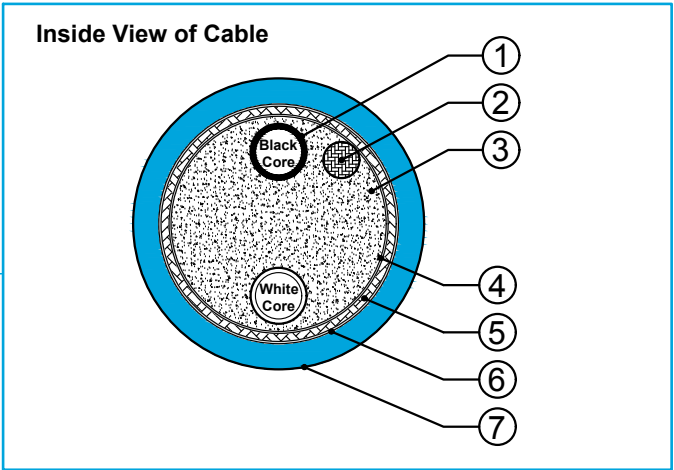

Materials of Cable: C01-025 Polyurethane Screened Coiled Cable			
Pos	Description	Overall Diameter	Remarks
1.	Tin plated copper conductor	1.02	24 AWG
2.	Screen wire of tin plated copper		24 AWG
3.	Poly filler insulation		
4.	Paper wrap insulation seperator		
5.	Braided screen of tin plated copper		
6.	Paper wrap insulation seperator		
7.	Polyurethane jacket	5.4mm (±0.1mm)	Non flame retardant, rated from -40°C to +80°C